

THE GROUND CONSTRUCTION OF BIFACIAL MODULES

CHARACTERISTIC

Keno sp.z o.o. is pleased to present you a solution with the use of a free-standing structure dedicated to the assembly of bifacial modules.





- COMPATIBLE WITH MOST MODULES
- POSSIBILITY OF ADAPTATION
 TO NEW MODULES FOR
 THE DEVELOPMENT OF THE
 INSTALLATION
- MOUNTING OF THE SUPPORTS USING A TILE OR EXCAVATOR


SEE CATALOG



TECHNICAL DRAWINGS

Keno sp.z o.o. provides a 10-year warranty on the above structure, thanks to the galvanized supports. In the case of a structure made of MAGNELIS coating, it is possible to extend it up to 25 years. The design allows for the installation of bi-facial modules in a configuration of 3 or 4 horizontally, depending on the width of the module. The design is compatible with all mounting profiles available from Keno sp.z o.o..

FREE-STANDING CONSTRUCTION ADJUSTABLE DOUBLE ARM

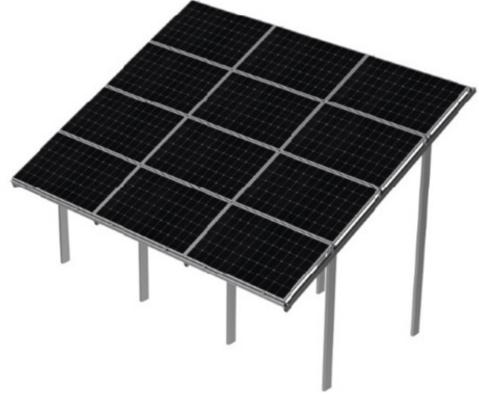

Arrangement for bifacial modules up to 1070mm in width



Arrangement for bifacial modules over 1070mm in width



KENO Sp. z o.o. ul. Daszyńskiego 609 44-151 Gliwice NIP: PL6312671983 BDO: 000006820 +48 32 230 25 71

⋈ biuro@keno-energy.com

www.keno-energy.com