

CHARACTERISTICS

Keno sp. z o.o. is pleased to present to you the screws used in our mounting systems dedicated to sheet metal roofs.

APPLICATION

- STEEL TILES
- TRAPEZOIDAL SHEET METAL
- STANDING SEAM

PROPERTIES

- STAINLESS STEEL A2
- SEALING WASHER
- HIGH LIABILITY



[SEE
CATALOG](#)




SHEET METAL SCREW

ELEMENT DESCRIPTION

K-20 sheet metal screws are widely used in KENO sp. z o.o.'s solutions. They are used for mounting systems mounted directly to the surface of sheet metal. The screws are equipped with a sealing washer to protect the mounting site from water. Installation of the screws is carried out using a screwdriver with a SW8 cap, not exceeding 1800 revolutions per minute.

MINIMUM SHEET THICKNESS	
STAINLESS STEEL	ALUMINIUM
0,4MM	0,5MM

TECHNICAL DRAWING

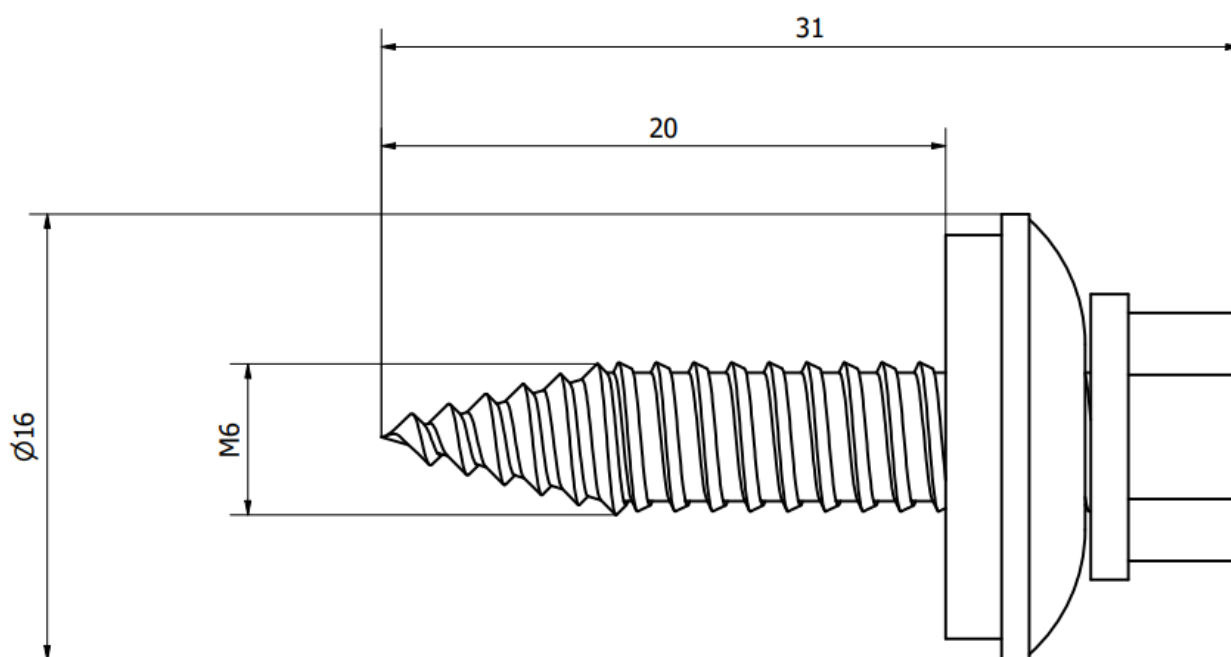

Rys.1 K-20 element dimensions