




ALUMINIUM HOOK K-64 MOUNTING SYSTEM

CHARACTERISTIC

Keno sp. z o.o. is pleased to present you with a solution for use on every roof type covered with ceramic pitched roof tiles. The construction characterized with double adjustment, which allows the mounting system to adapt to roof structure.

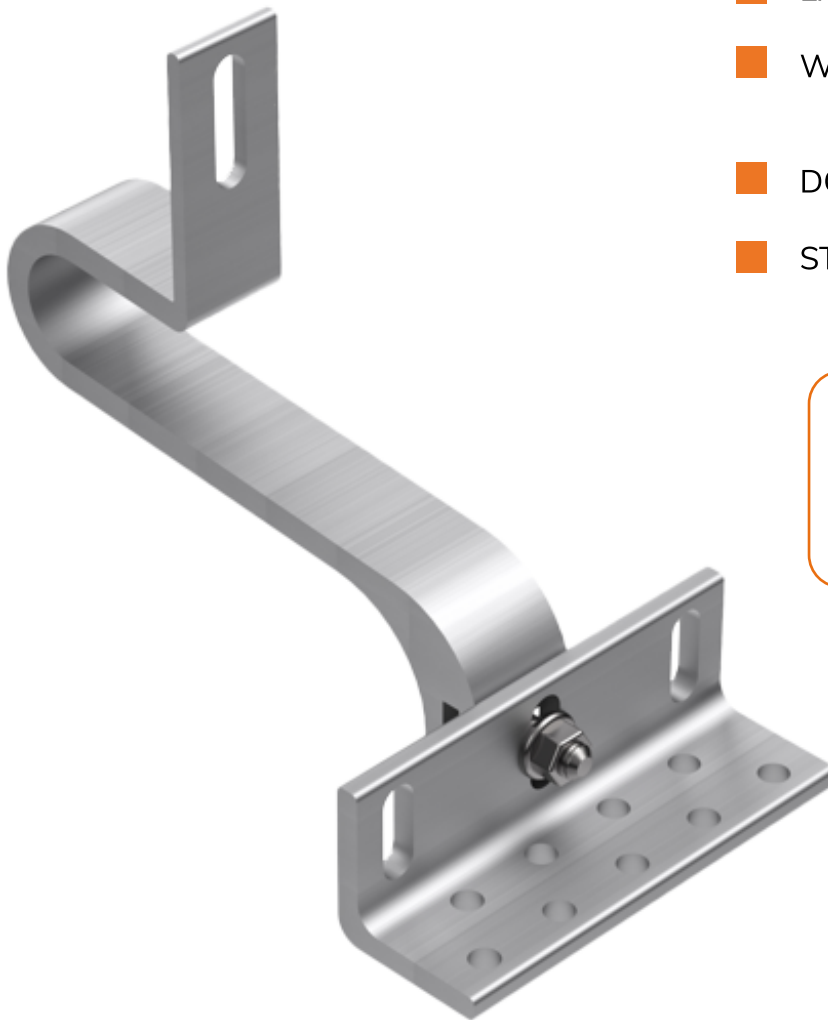

- EASY AND QUICK MOUNTING
- WIDER MOUNTING POINT SPACING
- DOUBLE ADJUSTMENT INCREASED
- STRENGTH

[SEE
CATALOG](#)



ALUMINIUM HOOK K-64 MOUNTING SYSTEM

DESCRIPTION OF THE CONSTRUCTION USING THE K-64 ELEMENT

The handle has been manufactured with the greatest care and quality. Keno sp. z o.o. provides a 10-year guarantee on this construction with the possibility of extending it by another 5 years due to the manufacturing of the element from high-quality aluminium. Its reinforced construction allows for the assembly of the handle by fixing it to the roof rafters using a minimum of two screws with a specially designed thread for wood. Thanks to the double adjustment, the bracket can be adapted to the majority of standard roof tiles available on the market. The handle is compatible with the K-70 mounting profile. The installation of the hook with the profile is done with a T-screw, which makes it possible to install the handle at any point of the profile.

TECHNICAL DRAWING

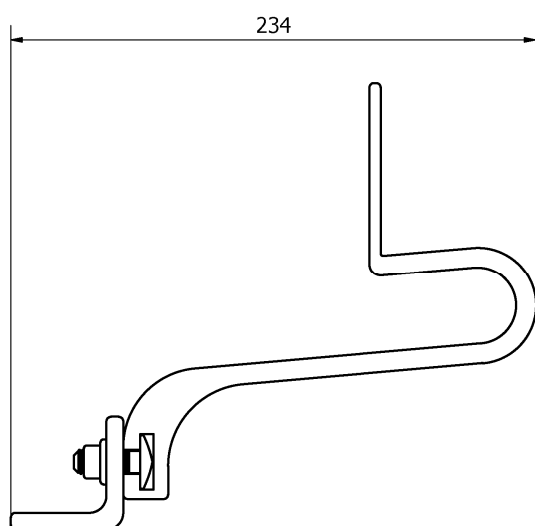


Fig.1

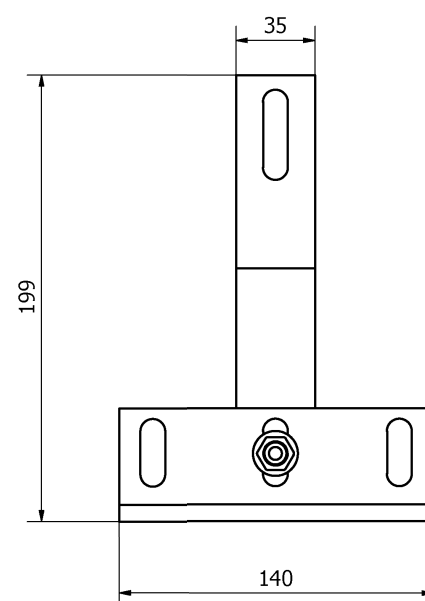


Fig.2