


THE TALLMAX^M

FRAMED 144 LAYOUT MODULE

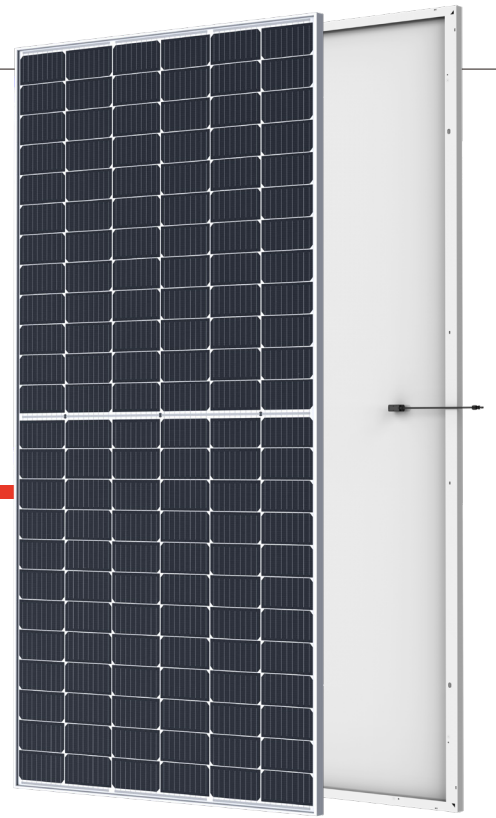

144 LAYOUT
MONOCRYSTALLINE MODULE

440-465W
POWER OUTPUT RANGE

21.3%
MAXIMUM EFFICIENCY

0~+5W
POSITIVE POWER TOLERANCE

PRODUCTS

TSM-DE17M(II)

POWER RANGE

440-465W



High power

- Up to 465W front power and 21.3% module efficiency with half-cut and MBB (Multi Busbar) technology bringing more BOS savings
- Lower resistance of half-cut and good reflection effect of MBB ensure high power



High reliability

- Ensured PID resistance through cell process and module material control
- Resistant to salt, acid and ammonia
- Mechanical performance: Up to 5400 Pa positive load and 2400 Pa negative load



High energy generation

- Excellent IAM and low light performance validated by 3rd party with cell process and module material optimization
- Better anti-shading performance and lower operating temperature


Founded in 1997, Trina Solar is the world's leading total solution provider for solar energy. With local presence around the globe, Trina Solar is able to provide exceptional service to each customer in each market and deliver our innovative, reliable products with the backing of Trina as a strong, bankable brand. Trina Solar now distributes its PV products to over 100 countries all over the world. We are committed to building strategic, mutually beneficial collaborations with installers, developers, distributors and other partners in driving smart energy together.

Comprehensive Products and System Certificates




IEC61215/IEC61730/IEC61701/IEC62716
 ISO 9001: Quality Management System
 ISO 14001: Environmental Management System
 ISO14064: Greenhouse Gases Emissions Verification
 ISO45001: Occupational Health and Safety Management System




PERFORMANCE WARRANTY

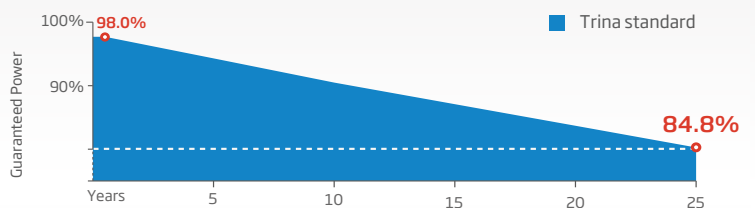


DIMENSIONS OF PV MODULE(mm)

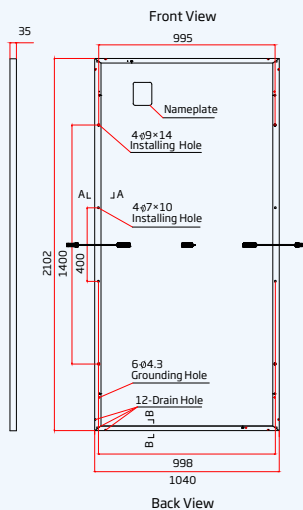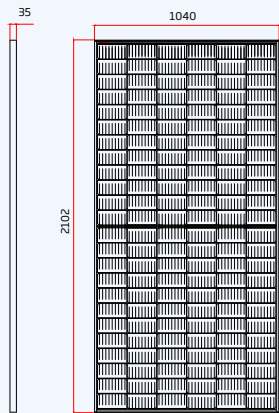

I-V CURVES OF PV MODULE(445W)

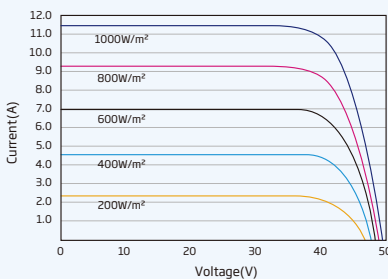

P-V CURVES OF PV MODULE(445W)

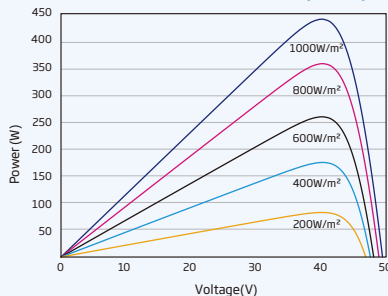

ELECTRICAL DATA (STC)

| | | | | | | |
|--------------------------------------|--------|-------|-------|-------|-------|-------|
| Peak Power Watts- P_{MAX} (Wp)* | 440 | 445 | 450 | 455 | 460 | 465 |
| Power Tolerance- P_{MAX} (W) | 0 ~ +5 | | | | | |
| Maximum Power Voltage- V_{MPP} (V) | 40.7 | 40.8 | 41.0 | 41.2 | 41.3 | 41.8 |
| Maximum Power Current- I_{MPP} (A) | 10.82 | 10.90 | 10.98 | 11.06 | 11.13 | 11.14 |
| Open Circuit Voltage- V_{OC} (V) | 49.2 | 49.4 | 49.6 | 49.8 | 50.0 | 50.0 |
| Short Circuit Current- I_{SC} (A) | 11.39 | 11.46 | 11.53 | 11.61 | 11.68 | 11.69 |
| Module Efficiency η_m (%) | 20.1 | 20.4 | 20.6 | 20.8 | 21.0 | 21.3 |

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5.

*Measuring tolerance: ±3%.

ELECTRICAL DATA (NOCT)

| | | | | | | |
|--------------------------------------|------|------|------|------|------|------|
| Maximum Power- P_{MAX} (Wp) | 332 | 336 | 340 | 344 | 347 | 351 |
| Maximum Power Voltage- V_{MPP} (V) | 38.4 | 38.5 | 38.7 | 38.9 | 39.1 | 39.4 |
| Maximum Power Current- I_{MPP} (A) | 8.66 | 8.71 | 8.77 | 8.84 | 8.89 | 8.90 |
| Open Circuit Voltage- V_{OC} (V) | 46.3 | 46.5 | 46.6 | 46.8 | 47.0 | 47.0 |
| Short Circuit Current- I_{SC} (A) | 9.18 | 9.24 | 9.29 | 9.36 | 9.41 | 9.42 |

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

| | |
|----------------------|--|
| Solar Cells | Monocrystalline |
| Cell Orientation | 144 cells (6 × 24) |
| Module Dimensions | 2102 × 1040 × 35 mm (82.76 × 40.94 × 1.38 inches) |
| Weight | 24.0 kg (52.9lb) |
| Glass | 3.2 mm (0.13 inches), High Transmission, AR Coated Heat Strengthened Glass |
| Encapsulant Material | EVA/POE |
| Backsheet | White |
| Frame | 35 mm (1.38 inches) Anodized Aluminium Alloy |
| J-Box | IP 68 rated |
| Cables | Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²), Portrait: N 280mm/P 280mm(11.02/11.02inches) Length can be customized |
| Connector | MC4 EVO2 / TS4* |

*Please refer to regional datasheet for specified connector.

TEMPERATURE RATINGS

| | |
|---|-------------|
| NOCT (Nominal Operating Cell Temperature) | 43°C (±2°C) |
| Temperature Coefficient of P_{MAX} | - 0.34%/ °C |
| Temperature Coefficient of V_{OC} | - 0.25%/ °C |
| Temperature Coefficient of I_{SC} | 0.04%/ °C |

(Do not connect Fuse in Combiner Box with two or more strings in parallel connection)

MAXIMUM RATINGS

| | |
|-------------------------|----------------|
| Operational Temperature | -40~+85 °C |
| Maximum System Voltage | 1500V DC (IEC) |
| Max Series Fuse Rating | 20A |

WARRANTY

| |
|--------------------------------------|
| 12 year Product Workmanship Warranty |
| 25 year Power Warranty |
| 2% first year degradation |
| 0.55% Annual Power Attenuation |

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

| |
|---------------------------------------|
| Modules per box: 31 pieces |
| Modules per 40' container: 682 pieces |